



- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- "UL8750 listed" safety approved for HLG-80H-□BL
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)















HLG-80H-12A

TAIWAN

Blank: IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.

BL (option): Contact MEAN WELL for details.

D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


MODEL		HLG-80H-12	HLG-80H-15	HLG-80H-20				HLG-80H-42	HLG-80H-48	HLG-80H-54			
	DC VOLTAGE	12V	15V	20V	24V	30 V	36V	42V	48V	54 V			
	CONSTANT CURRENT REGION Note.4	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V			
	RATED CURRENT	5A	5A	4A	3.4A	2.7A	2.3A	1.95A	1.7A	1.5A			
	RATED POWER	60W	75W	80W	81.6W	81W	82.8W	81.9W	81.6W	81W			
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p			
	VOLTAGE ADJ. RANGE Note.6	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V			
OUTPUT	CURRENT ADJ. RANGE	Can be adjust	ed by internal p	potentiometer /	A type only								
	CORRENT ADJ. RANGE	3 ~ 5A	3 ~ 5A	2.4 ~ 4A	2.04 ~ 3.4A	1.62 ~ 2.7A	1.38 ~ 2.3A	1.17 ~ 1.95A	1.02 ~ 1.7A	0.9 ~ 1.5A			
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME Note.8	1200ms,80ms/115VAC 500ms,80ms/230VAC at full load; B type 1200ms,200ms/115VAC 500ms,200ms/230V											
	HOLD UP TIME (Typ.)	16ms at full lo	ad 230VAC	/115VAC									
		90 ~ 305VAC	127 ~ 431	1VDC									
	FREQUENCY RANGE	47 ~ 63Hz											
	POWER FACTOR (Typ.)	PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
INPUT	TOTAL HARMONIC DISTORTION	THD<20% when output loading≥60% at 115VAC/230VAC input and output loading≥75% at 277VAC input											
	EFFICIENCY (Typ.)	88%	89%	90%	90.5%	91%	91%	91%	91%	91%			
	AC CURRENT (Typ.)	0.85A / 115VAC											
	INRUSH CURRENT (Typ.)	COLD START 70A(twidth=485µs measured at 50% lpeak) at 230VAC											
	LEAKAGE CURRENT	<0.75mA / 277VAC											
		95 ~ 108%											
	OVER CURRENT Note.4	Protection type: Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed											
PROTECTION	SHORT CIRCUIT	14 ~ 17V	18 ~ 24V	23 ~ 30V	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 63V	59 ~ 68V			
	OVER VOLTAGE	Protection type : Shut down o/p voltage, re-power on to recover											
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover											
	WORKING TEMP.	-40 ∼ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH non-condensing											
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80 °C , 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)											
	VIBRATION					ong X, Y, Z axes							
	SAFETY STANDARDS Note.7	UL8750, CSA C22.2 No. 250.0-08(except for HLG-80H-48/54V & HLG-80H-48/54BL), UL8750 listed for HLG-80H-BL											
	O'A ETT O IVALDA ROLE.	EN61347-1, EN61347-2-13 independent, J61347-1, J61347-2-13, IP65 or IP67 approved; Design refer to UL60950-1, TUV EN60950-											
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC											
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-F	G, O/P-FG:10	00M Ohms / 50	0VDC / 25°C /	70% RH							
	EMC EMISSION	Compliance to	EN55015, EN	161000-3-2 Cla	ass C (≧60%	load) ; EN6100	0-3-3						
	EMC IMMUNITY	Compliance to	EN61000-4-2	2,3,4,5,6,8,11,	EN61547, EN5	5024, light indu	ustry level (sur	ge 4KV), criteri	ia A				
	MTBF	357.8K hrs min. MIL-HDBK-217F (25°C)											
OTHERS	DIMENSION	195.6*61.5*38.8mm (L*W*H)											
	PACKING	0.84Kg; 16pc	s/14.4Kg/0.540	CUFT									
NOTE	2. Ripple & noise are measure	lly mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. ed at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation.											

- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. Derating may be needed under low input voltages. Please check the static characteristics for more details.
- 6. A type only
- 7. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.
- 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.


 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

 10. Refer to warranty statement.
- 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains



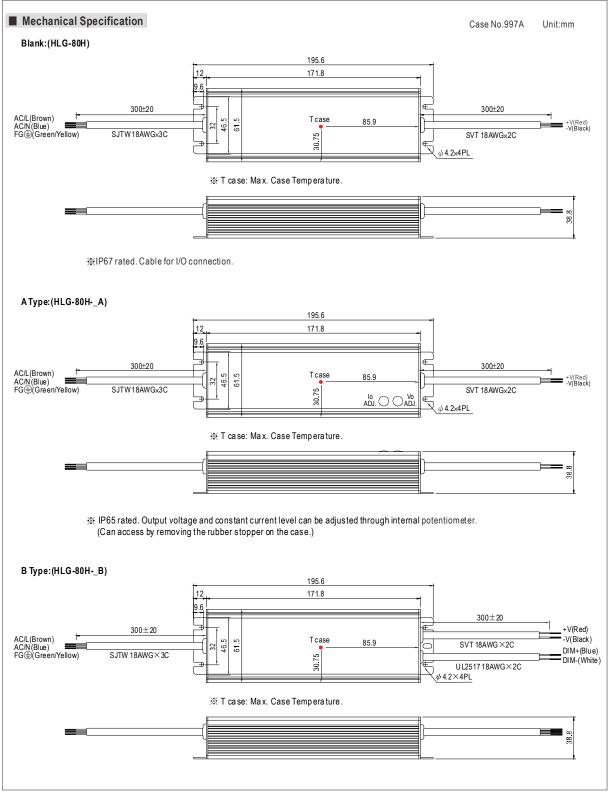




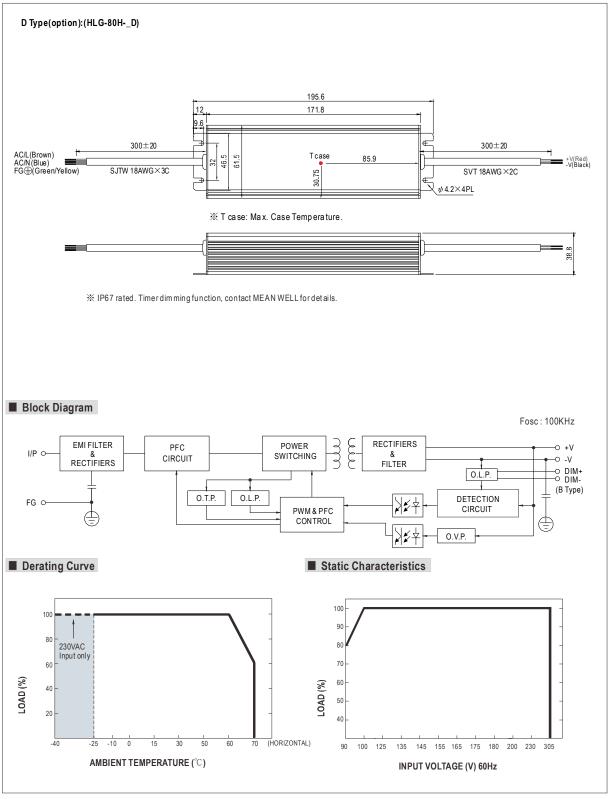




■ Power Factor Characteristic

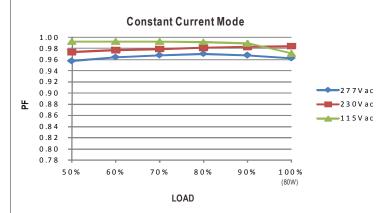

■ EFFICIENCY vs LOAD (48V Model)

 $HLG-80H\ series\ possess\ superior\ working\ efficiency\ that\ up\ to\ 91\%\ can\ be\ reached\ in\ field\ applications.$

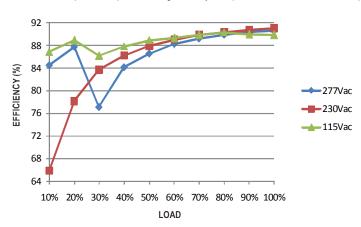


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode [with LED driver, at area (A)] and CC mode [direct drive, at area (B)].




Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION



- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10K Ω	$20 \text{K}\Omega$	$30 \mathrm{K}\Omega$	$40 \mathrm{K}\Omega$	$50K\Omega$	$60 \mathrm{K}\Omega$	70K Ω	$80 \mathrm{K}\Omega$	$90 \mathrm{K}\Omega$	$100 \text{K}\Omega$	OPEN
	Multiple drivers (N=driver quantity for synchronized dim ming operation)	10K Ω/N	20K Ω/N	30K Ω/N	40K Ω/N	50K Ω/N	60K Ω/N	70K Ω/N	80K Ω/N	90K Ω/N	100K Ω/N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

imes 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

¾ 10V PWM signal for output current adjustment (Typical): Frequency range:100Hz ~ 3KHz

Dutyvalue	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

- XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- XDirect connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/O FF :

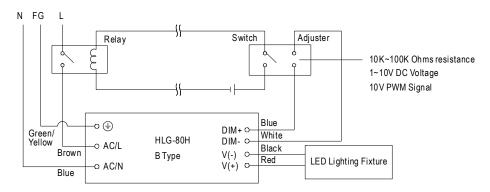

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be tured O N/OFF by the switch.



